



Laboratory Gas Generators

TECHNICAL DATA SHEET

'LABGAS+' - Intelligent Gas Generators

- Features**
- Range of Flow-rates
 - With or without Internal oil-free air compressor
 - Compact and Quiet design
 - Purity 99.9995% - 98%
 - Auto-run facility
 - Energy saving mode
 - Outlet flow indicator (% flow)
 - Trend graphs into MS excel
 - Alarms with help menu
 - Audible alarm sounder
 - Remote access via internet

- Applications**
- Pharmaceutical & Laboratory:-
 - General laboratory
 - GC
 - ELSD
 - LC/MS
 - ICP
 - TurobVap
- Options**
- Hazardous Area Ex Version
 - Custom Screens
 - Oxygen analyser
 - Dew-point sensor

'LABGAS+', is the latest range of PSA Laboratory Gas Generators from Noblegen Products.

Utilising the reliable and efficient PSA technique of separating Nitrogen and Oxygen is used to produce high quality Nitrogen Gas at various flows and purities (see performance data sheets).

The Generators are controlled using the latest in HMI touch screen technology to display the process in real-time, inlet / outlet pressures, Trend graphs and much more.....



model NG1-1 shown

- New features include:-**
- Alarm display with help menu
 - Outlet Flow Indicator
 - Trend graphs for QA reporting
 - Energy saving mode
 - Remote access to Screen using internet
 - Service alarm and service records page
 - Oxygen Analyser (optional)

Overview:-

LABGAS+ Nitrogen Generator range from Noblegen Products is your reliable and efficient alternative to conventional high pressure cylinder and liquid gas supplies. Taking away the on-going costs, safety considerations and transportation of traditional gas supplies, the 'LABGAS+' on-site Nitrogen systems are some of the most advanced and intelligent available. The control system gives the user all the information necessary to ensure an efficient and consistent supply of gas is always available. From the process to flow and alarms, including auto-start / stop function, Trend graphs, service alarm and service records page, there is simply no other laboratory nitrogen system quite like LABGAS+.

NOBLEGEN PRODUCTS
 5 PARKER COURT
 GATESHEAD
 TYNE & WEAR ,
 NE11 9EW
 UNITED KINGDOM
 T: +44(0)191 460 1177
 F: +44(0)191 460 1079
 E: sales@noblegen.co.uk
 W: www.noblegen.co.uk



Noblegen is a Wirac Automation Product



Laboratory Gas Generators

TECHNICAL DATA SHEET

'LABGAS+' - Intelligent Gas Generators

- Features**
- Range of Flow-rates
 - with or without internal oil-free air compressor
 - Compact and quiet design
 - Purity 99.9995% - 98%
 - Auto-run facility
 - Energy saving mode
 - Outlet flow indicator (% flow)
 - Trend graphs into MS excel
 - Alarms with help menu
 - Audible alarm sounder
 - Remote access via internet

Nitrogen Outlet Flowrate - NI/min vs Oxygen Concentration									
Model	5ppm	100ppm	0.1%	0.5%	1.0%	2.0%	outlet pressure (barg)	Dims -0	Dims -1
NG1	1.0	-	-	-	-	-	5.0	size 1	size 1
NG3	3.0	-	-	-	-	-	5.0	size 3	size 3
NG4	-	-	3.0	4.0	-	-	5.5	size 2	size 2
NG5	-	4.0	6.0	8.0	10.0	12.0	5.0	size 3	size 3
NG6	-	-	15.0	30.0	35.0	40.0	7.0	size 3	size 3
NG7	-	-	10.0	15.0	20.0	25.0	7.0	size 3	size 3


Specification based on 7barg (102psig) air inlet pressure @ 20°-25°C (68°-77°F) ambient air temperature. For inlet pressures and ambient air temperature outside these conditions please contact NobleGen technical department.

- Applications**
- Pharmaceutical
 - General laboratory
 - GC
 - ELSD
 - LC/MS
 - ICP
 - Turbovap

Ambient Temp Range	5-30 °C (41-86 °F)
Air Inlet Pressure	8 bar g (116 psi g)
Nitrogen Outlet Pressure*	See table above
Air Inlet Requirement	Dew-point -40 °C (-40 °F)
	Particulate: <0.1 micron
	Oil: <0.01 mg/m ³
Electrical Supply	230v a.c. / 1ph / 50-60Hz
	115v a.c. / 1ph / 50-60Hz
Socket Inlet	IEC type C14 (fused) 10A max
Inlet / Outlet Connections	1/4" BSPP

- Options**
- Hazardous Area Ex version
 - Custom screens
 - Oxygen analyser
 - Dew-point sensor

Dimensions & Weights				
Enclosure size	Height mm	Width mm	Depth mm	Weight Kg
Size 1	650	320	300	25
Size 2	650	320	550	40
Size 3	700	400	660	80
Size 3 enclosure has castors: add 50mm to height				
Shipping dimensions add 50mm to each above				
Shipping weight add 15kg to each above				

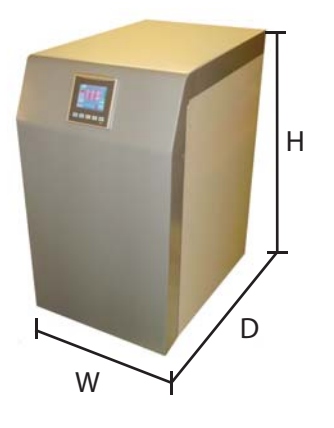

NOBLEGEN PRODUCTS
 5 PARKER COURT
 GATESHEAD
 TYNE & WEAR ,
 NE11 9EW
 UNITED KINGDOM
 T: +44(0)191 460 1177
 F: +44(0)191 460 1079
 E: sales@noblegen.co.uk
 W: www.noblegen.co.uk



Noblegen is a Wirac Automation Product